


Model:ID-52N



Technology Parameter

Work frequency	2.45GHz&125KHz&13.56MHz
Reader type	Semi-active card reader, Mifare reader
Reading range	≤8M
Standby current	≤4uA
Working current	≤4.5mA
Operating temp	-20℃～60℃
Using life	>2years
Protection grade	IP54
Material	ABS+PC
Anti- to drop	Concrete surface 1.5M/2 times

Size(mm)

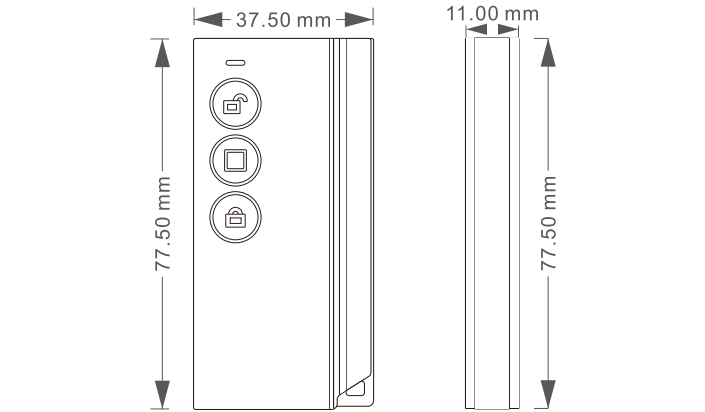

Application

Model	Parking	Auto-gate	Rolling Door	Elevator	Alarm	Personnel Tracking	Door
ID-62/52	✓	✓	✓	✓	✓	✓	✓
ID-24	✓	✓	✓		✓		

Model:ID-52



Technology Parameter

Work frequency	2.45GHz&125KHz
Reader type	Semi-active card reader
Reading range	≤8M
Standby current	≤1uA
Working current	≤11mA
Operating temp	-20℃～60℃
Using life	>2years
Protection grade	IP54
Material	ABS+PC
Anti- to drop	Concrete surface 1.5M/2 times

Size(mm)

