


08 LONG RANGE READER (125Khz) Our Product

PRODUCT NAME

YCH-GP-99

Model:GP-99

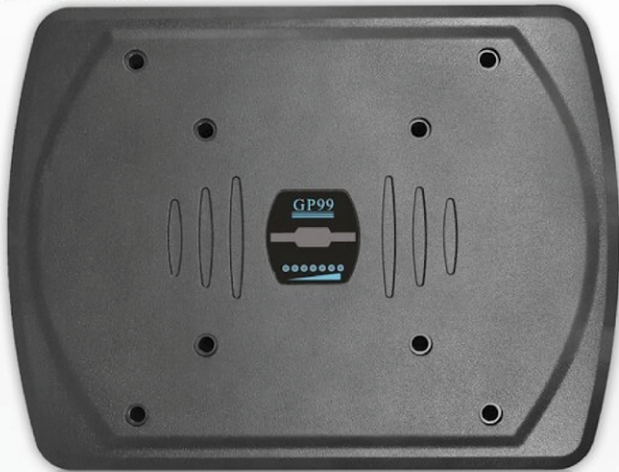

Model:EM-51



Model:CS-56

PRODUCT SPECIFICATION

Technology Parameter

Power supply	DC12V/1A
Work current	≤ 450mA
Baud rate	9600,n,8,1
Work frequency	125K
Operating temp	-40℃~+60℃
Relative humidity	≤ 90%
Read distance	0.9M-1.3M (in the air)
Output Mode	Wigand 26/34 RS232/RS485
WaterProof	IP65
Cover Material	ABS + PC, UV protection
Copper core load capacity	136A

Function And Advantage Introduction

GP-99 is more stronger and long reading distavce than other similar RFID readers

GP-99 reading range up to 1.3 meters and it have strong working mode and anti-interface ability, long distance, stable working, high resistance to meal pollution.

Can penetrate any brand solar film and low cost rfid solution

Comparing with other frequency RFID reader, GP-99 can penetrate any brands solar film in market to offer affordable 1.3m reading range without winding down car window. Its reading range will not be affected or decrease 3-5CM by thr V-KOOL (vehicle solar film).

PRODUCT NAME**YCH-GP-99****Totally hands free access control solution**


GP-99 with EM card sticker, so you no need to stop your car and wind down your car window to read card. Other similar products need to stop car to read card or flash card. So GP-99 hands solution can save your time and more safe.

Strong ability to adapt the environment

Gp-99 and high quality power supply with noise filter included. That adopt low ripple processing technology, which can effectively resist any external interface source and be affordable work in any environment.

Easy to integrate into any company access control system and easy to upgrade the old projects

GP-99 can effectively integrate with any company with their own access control system, also with Weigand 26/ Weigand 34 interface, RS485/RS232 interface, that will be more convenient to update the system or management for our users.

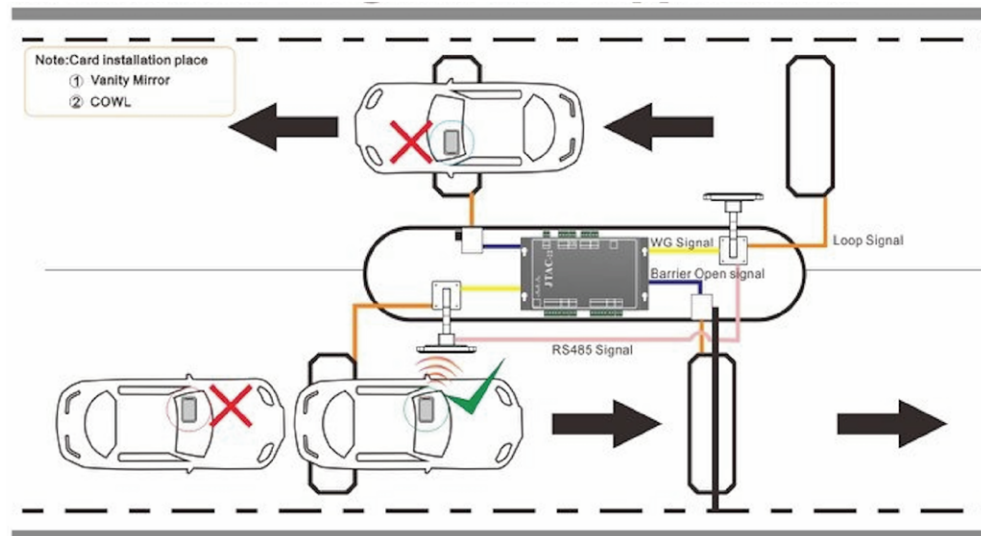INSTALLATION DIAGRAM AND APPLICATION

SIZE : MM

